

09/12/00  
JC932 U.S. PTO

09-13-00

IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

PATENT APPLICATION

Farooq Ullah Khan  
Sanjiv Nanda

CASE 3-53

TITLE Method And Apparatus For Asynchronous Incremental Redundancy Reception In A  
Communication System

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

NEW APPLICATION UNDER 37 CFR § 1.53(b)

Enclosed are the following papers relating to the above-named application for patent:

Specification  
1 Informal Sheets of drawing(s)  
1 Assignment(s) with Cover Sheet  
Declaration and Power of Attorney

CLAIMS AS FILED				
	NO. FILED	NO. EXTRA	RATE	CALCULATIONS
Total Claims	12 - 20 =	0	x \$18 =	\$0
Independent Claims	2 - 3 =	0	x \$78 =	\$0
Multiple Dependent Claims, if applicable			+ \$260 =	\$0
Basic Fee				\$690
			<b>TOTAL FEE</b>	<b>\$690</b>

Please file the application and charge **Lucent Technologies Deposit Account No. 12-2325** the amount of \$690, to cover the filing fee. Duplicate copies of this letter are enclosed. In the event of non-payment or improper payment of a required fee, the Commissioner is authorized to charge or to credit **Deposit Account No. 12-2325** as required to correct the error.

The Assistant Commissioner for Patents is hereby authorized to treat any concurrent or future reply, requiring a petition for extension of time under 37 CFR § 1.136 for its timely submission, as incorporating a petition for extension of time for the appropriate length of time if not submitted with the reply.

Please address all correspondence to **Docket Administrator (Room 3C-512), Lucent Technologies Inc., 600 Mountain Avenue, P.O. Box 636, Murray Hill, New Jersey 07974-0636**. However, telephone calls should be made to me at 973-386-8252.

Respectfully,

*Claude R. Narcisse*

Claude R Narcisse

Reg. No. 38979

Attorney for Applicant(s)

Date:

9/12/2000

Lucent Technologies Inc.

EE727827695 A

Express Mail® Mailing Label Number	
Date of Deposit	9/12/00
I hereby certify that this <u>application</u>	
being deposited with the United States Postal	
Service, "Express Mail Post Office to Addressee"	
service under 37 CFR 1.10 on the date indicated	
above and is addressed to the Assistant	
Commissioner for Patents, Washington, DC, 20231,	
on	9/12/00
<i>Am S. Nanda</i>	
Printed name of person mailing paper of fee	
<i>C. Narcisse</i>	
Signature of person mailing paper of fee	

JC941 U.S. PTO  
09/660092  
09/12/00

09660092, 091200

# METHOD AND APPARATUS FOR ASYNCHRONOUS INCREMENTAL REDUNDANCY RECEPTION IN A COMMUNICATION SYSTEM

## Background of the Invention

5

### Related Application

Related subject matter is disclosed in the following application concurrently filed  
herewith: U.S. Patent Application entitled "Method and Apparatus For Asynchronous  
10 Incremental Redundancy Transmission In A Communication System", Serial No. \_\_\_\_.

### Field of the Invention

The present invention relates to a method for an Automatic Repeat Request  
(ARQ) technique for communication systems.

15

### Description of the Related Art

The quality of communication channels within communication systems  
determines the efficiency of the communication system. One measure of efficiency is the  
20 system's throughput. The throughput is the amount of information that is successfully  
transmitted and received in a communication system for a defined period of time. It is  
therefore a goal of service providers (owners and operators of communication systems) to  
have as many of their communication channels as possible operating at an acceptable  
throughput.

25

In wireless communication systems, the communication channels used by a  
subscriber of such a system are commonly known as the air interface. The air interface is  
used for the exchange of information between a mobile (e.g., cell phone) and a base  
station or other communication system equipment. The air interface comprises a plurality  
30 of communication channels. The quality of any one of the channels of the air interface  
varies. Thus, for example, any particular channel between the base station and a mobile  
may have an acceptable throughput at one instant and unacceptable throughput at another

007650-2609960

instant. Service providers not only want to maintain the throughput of their air interface at an acceptable level, but also want to increase the throughput as much as possible.

Many times the information transmitted through a relatively low quality communication channel is adversely affected to such an extent that the information contains errors when received. In an effort to increase the throughput of such channels, communication systems apply the technique of retransmission of information. Transmitting equipment retransmits the information to receiving equipment a certain number of times to increase the likelihood that the information, once received, contains no errors or contains an acceptable number of errors. The receiving equipment can be either system equipment such as a base station or subscriber equipment such as a cell phone. Similarly, the transmitting equipment can also be system equipment or subscriber equipment. System equipment is any equipment owned and operated by the service provider.

A widely used technique for the retransmission of information due to errors detected at the receiving equipment is called Automatic Retransmission Request (ARQ). The ARQ method is a technique of confirming that information transmitted through a communication channel has been received without any errors. Receiving equipment sends a message to transmitting equipment confirming that the transmitted information was received without errors. If the transmitted information was received with errors, the receiving equipment sends a message to the transmitting equipment asking the transmitter to retransmit the information. The transmitter can retransmit all or part of the previously transmitted information using the same or different channel coding.

ARQ is typically used in concert with channel coding. Channel coding is the creation of redundancy in the transmitted information to allow receiving equipment to check as well as correct for errors. Also, the receiving equipment performs a corresponding decoding operation to obtain the information. The decoding operation is performed by a decoder. Two of the main ARQ methods are the Selective Retransmit

(SR) protocol and the Stop-and-Wait protocol. In both SR ARQ and Stop-and-Wait ARQ, the concept of Incremental Redundancy (IR) is used. Incremental Redundancy (IR) and/or soft combining, are techniques used to improve the efficiency of ARQ. In IR, the receiving equipment attempts to combine, in the decoder, retransmitted information along with earlier transmissions of the same information that used the same or different coding. The decoding of combined information improves the performance of the decoding operation and increases the likelihood of successful decoding; decoding of combined information reduces the number of retransmissions that would be required to successfully receive the transmitted information. In the prior art, IR schemes that operate with SR ARQ and with Stop-and-Wait ARQ have been defined.

In the IR scheme operating with SR ARQ, information is typically encoded, formatted and packaged as packets comprising payload, header and trailer portions. The trailer and header portions are overhead in that they do not contain subscriber information; they contain information identifying the subscriber (i.e., identification information) and information on how to process the packet (i.e., process information). The information identifying the particular subscriber from whom the information in the payload of the packet originated is kept in the header. Also, the header contains information on how to soft combine, at the decoder, the received packets so as to properly decode the payload information.

An arbitrary number of copies of each block of information can be sent so that the original information can be derived from one or from a combination of the received packets of information. Different subscribers can transmit different amounts of information and at different rates. As described above, however, much information is needed to describe how the information is to be processed once it is received. The SR protocol is not bandwidth efficient because of the excessive overhead information. However, without the use of the header information, the receiving equipment is not able to identify, and properly combine and decode the received packets of information. To reduce the likelihood that the header information is contaminated resulting in errors, the

header portion of the packets is heavily coded. The heavy coding is more robust coding that requires more redundancy to be added to the header information. Thus, the heavy coding creates even more overhead, which reduces the throughput of the communication channels thus reducing the efficiency of the communication system.

5

In the IR scheme with Stop-and-Wait ARQ protocol, a block of information is coded into  $n$  packets where  $n$  is an integer equal to 2 or greater. Each one of the packets by itself or in combination with another packet or a portion of another packet can be used to decode the original block of information. One or more of the packets are transmitted during a time slot(s) assigned to a particular subscriber. The transmitted packets are received and decoded. If the decoding was successful (i.e., no errors detected or an acceptable number of errors detected), the receiving equipment transmits an ACK (ACKnowledge) message to the transmitting equipment indicating that the information was properly decoded and that a new block of information can be transmitted. If the decoding was unsuccessful (i.e., error detected or an unacceptable number of errors detected), the receiving equipment transmits a NACK (Negative ACKnowledge) which is an indication to the transmitting equipment to retransmit another group of packets (or another single packet) representing the same block of information. The ACK message is thus an example of a positive confirmation message and the NACK message is an example of a negative confirmation message. Upon reception of a NACK message the receiving equipment stores the received error-containing packet. The receiving equipment will attempt to combine this stored packet with subsequent repeat packet transmissions for the same block of information, to properly decode the information within such block. The ACK or NACK confirmation messages are hereinafter referred to as the ACK/NACK messages.

The receiving equipment transmits the ACK/NACK message following the reception of a packet in a particular time slot assigned to a subscriber. Thus, the ACK/NACK messages are transmitted in accordance with a particular timing relationship to the packet reception. The transmit equipment associates a particular ACK/NACK

message with a particular packet transmission based on the time slot or the time period within which such a message was received. For example, an ACK/NACK message received during slot period  $m$  corresponds to a packet transmission in slot  $m-k$ , where  $k$  represents a particular number (including fractions of time slots) of time slots which is fixed by the communication system;  $m$  is an integer equal to 1 or greater and  $k$  is a number greater than zero. The number of time slots represented by  $k$  is a roundtrip delay for transmitting equipment representing the time elapsed between a transmission of a packet and the reception of a responding ACK/NACK message.

Upon receipt of a NACK (in a particular time slot) in response to a packet transmission, the transmitting equipment transmits a repeat packet representing the same block of information. The transmitting equipment transmits the repeat packet transmission a certain number of time slots following the receipt of the ACK/NACK message. Thus, the repeat packet is transmitted in accordance with a particular timing relationship to the received ACK/NACK message.

The receive equipment associates a particular repeat packet transmission with a ACK/NACK message based on the time slot or the time period within which such a message was received. For example, a repeat packet transmission received during slot period  $n$  corresponds to a ACK/NACK message transmitted in slot  $n-j$ , where  $j$  represents a certain number of time slots (including fractions of time slots) which is fixed by the communication system;  $n$  is an integer equal to 1 or greater and  $j$  is a number greater than zero. The number of time slots represented by  $j$  is a roundtrip delay for receiving equipment representing the time elapsed between the transmission of an ACK/NACK message and the reception of a repeat packet. Therefore, there is no need to transmit identification information in the headers of the packets because the packets can be identified and soft combined based on the time slot in which they were received.

The Stop-and-Wait protocol in the prior art is thus a Synchronous Protocol in that the repeat packet transmissions are transmitted within a strict timing relationship (defined

by the communication system) between transmitting equipment and receiving equipment. Consecutive packet transmissions of the same block of data are separated by a time period usually expressed in terms of number of slots where such time period is constant. In sum, when a transmission is made, an ACK/NACK message indicating a NACK (or  
 5 ACK) followed by a repeated packet transmission (or a new packet transmission) must be transmitted a certain fixed number of slots later.

The Stop-and-Wait protocol as implemented in the prior art, has several drawbacks stemming from its synchronous nature and the manner in which it is typically  
 10 implemented. Because of the strict timing relationship imposed on the transmissions, it is very difficult to accommodate different subscribers having different transmission rates or different roundtrip delays. Subscribers having different transmission rates transmit (or receive) information within different number of assigned consecutive time slots. For example, some subscribers use three time slots to transmit (or receive) their block of  
 15 information while others use only one time slot. The transmission roundtrip delay is the amount of time elapsed between consecutive transmissions of packets or group of packets. In the Stop-and-Wait protocol, the transmission roundtrip delay is kept fixed.

A major drawback of the Stop-and-Wait protocol is the resulting loss of  
 20 synchronization between transmission equipment and receiving equipment for a relatively long period of time when an ACK/NACK message is misinterpreted. For whatever reasons or conditions that occur in a communication channel, many times an ACK will be received and misinterpreted as a NACK or vice versa. The misinterpretation of the ACK/NACK messages causes the receiving equipment to process improperly the  
 25 received block of information and lose synchronization with the transmitting equipment. For example, suppose a block of information (e.g., a packet) is transmitted and then received erroneously. The receiving equipment stores the received block of information and transmits a NACK message to the transmitting equipment. However, the NACK message is adversely affected by the channel and is interpreted as an ACK message. The  
 30 transmitting equipment will then improperly transmit a new block of information to the

receiving equipment. The receiving equipment receives the block of information and interprets it as a retransmission. Accordingly, the receiving equipment combines this received block of information with the stored block of information; the combination operation is improper here because a new block of information was transmitted. As a result, the combined block of information will generate errors when it is decoded causing the receiving equipment to send a second NACK message. At this point the transmitting equipment has lost synchronization with the receiving equipment. Losing synchronization refers to the receiving equipment and the transmitting equipment interpreting the same information differently. For example, in the sequence of events described above, a block of information is interpreted as a NACK message by the receiving equipment but the transmitting equipment interprets the same block of information as an ACK message. Further subsequent new transmissions by the transmitting equipment will be interpreted as retransmissions by the receiving equipment.

Therefore, what is needed is an ARQ technique that provides a mechanism for relatively fast recovery from misinterpretations of confirmation messages.

### Summary of the Invention

The present invention provides a method which implements an ARQ technique used with Incremental Retransmission (IR) that allows receiving equipment to recover, in a relatively short period of time, from misinterpretations of confirmation messages transmitted by such receiving equipment. The receiving equipment decides which confirmation message to transmit based on the value of an information status flag contained in received information and the result of a decoding operation performed on the received information thus providing a technique for recovering from misinterpretations of previous confirmation message transmissions. The method of the present invention can be used in wireless communication systems and other types of communication systems.



At the initial stage of the method of the present invention, information received by receiving equipment is processed to determine if it is new or part of information that is currently being transmitted, i.e., continue information. The received information contains, *inter alia*, an information status flag indicating whether the information is NEW  
 5 information or CONTINUE information. Initially, the receiving equipment is waiting for NEW information. If the status flag indicates that the received information is NEW, a decoding operation is performed on the information. If the status flag indicates that the received information is CONTINUE, a positive confirmation message (e.g., ACK) is transmitted by the receiving equipment which then once again waits for NEW  
 10 information.

Continuing with the case where the received information was new resulting in a decoding operation: If the decoding is successful, a positive confirmation message (e.g., ACK) is transmitted by the receiving equipment which then waits for another new block  
 15 of information after returning to the initial stage of the method of the present invention. If the decoding is not successful, a negative confirmation message (e.g., NACK) is transmitted by the receiving equipment, which then stores the received information and waits for CONTINUE information. While waiting for CONTINUE information, if the next information received is CONTINUE information, it is combined with the stored  
 20 information and performs a decoding operation. However, if the next transmitted information was NEW information, a decoding operation is immediately performed.

Therefore, the method of the present invention causes receiving equipment to always send a positive confirmation message whenever the receiving equipment receives  
 25 CONTINUE information while waiting for NEW information. Further, regardless of whether the receiving equipment is waiting for NEW or CONTINUE information, when the information is NEW, a decoding operation is immediately performed. The combining previously received information with current received information and decoding the combined information is performed only when the receiving equipment is waiting for  
 30 CONTINUE information and indeed receives CONTINUE information.

## Brief Description of the Drawings

FIG. 1 shows a flowchart depicting the steps of the method of the present invention.

5

## Detailed Description

The present invention provides a method that implements an ARQ technique used in communication systems, which method allows for relatively fast recovery from misinterpretations of previous confirmation message transmissions. The previous confirmation messages represent the very last confirmation message transmitted by the receiving equipment. The misinterpretation is committed by transmitting equipment which receive confirmation messages from the receiving equipment. The method of the present invention is described from the standpoint of receiving communication equipment. The present invention also provides an apparatus that allows for relatively fast recovery from misinterpretations of confirmation message transmissions. The apparatus may be implemented as hardware (i.e., digital and/or analog hardware), microprocessor and/or digital processor based circuitry used in conjunction with firmware and/or software. The apparatus resides in both transmitting equipment and receiving equipment.

The information being received is categorized as either NEW information or CONTINUE information. NEW information represents the beginning of the information being transmitted. CONTINUE information represents information that follows the NEW information and is part of the NEW information. CONTINUE is thus the continuation of previously transmitted information or the retransmission of previously transmitted information that was decoded unsuccessfully. The information is formatted into blocks of information. Each block of information is coded and segmented into a plurality of sub-blocks. Depending on the type of coding used, each sub-block may contain information representing an entire block of information or part of an entire block

of information. Therefore, depending on the coding, the entire block of information can be decoded from one sub-block or several sub-blocks may be needed to decode the block of information.

5 Referring to FIG. 1, there is shown the method of the present invention for receiving equipment in a communication system that uses ARQ. For ease of explanation, the received information are sub-packets of information resulting from packets of information being coded by a channel coder and segmented into one or more sub-packets. Each sub-packet contains, preferably in its header, an information status flag (hereinafter  
10 “NEW/CONTINUE” flag) and subscriber identification information. The NEW/CONTINUE flag is preferably a one-bit flag where a 0 bit indicates CONTINUE information and a 1 bit indicates NEW information. It should be noted that the NEW/CONTINUE flag can use more than one bit to indicate the status of the received information, but in the interest of reducing overhead a one-bit flag is preferable. The  
15 subscriber identification information associates each sub-packet to a particular subscriber. Because the flag uses only one bit, the coding of this flag does not use much overhead even when the flag is heavily coded; heavy coding refers to additional amounts of redundancy used to perform the coding operation. It should be noted that the NEW/CONTINUE flag can be stored anywhere in a sub-packet or anywhere in any other  
20 type of block of information. As previously stated, the NEW/CONTINUE flag can be more than one bit. For example, the NEW/CONTINUE flag can be implemented with two bits wherein each two bit value not only identifies the type of information contained in the sub-packet but also identifies the particular sub-packet in terms of the sequence of sub-packets. The two-bit flag thus assists equipment receiving the sub-packets to  
25 perform various operations such as decoding and combining of packets. For example, a two-bit flag for a group of 3 packets may be used as follows:

00—NEW sub-packet; 01—CONTINUE sub-packet 1; 10—CONTINUE sub-packet 2; 11—CONTINUE sub-packet 3. It should also be noted that the NEW/CONTINUE flag and the identification information may be transmitted separately  
30 from the sub-packet payload. For example, the identification information and the

information status flag can be transmitted and received on a separate code multiplexed channel in a CDMA (Code Division Multiple Access) communication system, or separate time slots may be reserved for these fields in a TDMA (Time Division Multiple Access) communication system.

5

In step 102, receiving equipment is waiting for new information. In step 104, the receiving equipment has received a sub-packet and determines whether the received sub-packet is NEW or CONTINUE information. The receiving equipment examines the  
 10 NEW/CONTINUE flag within the header of the received sub-packet. If the flag indicates CONTINUE information, the method of the present invention moves to step 118 where it transmits a positive confirmation message (e.g., ACK), discards the received sub-packet and returns to step 102 where it again waits for NEW information (i.e., a NEW packet).

15

Returning to step 104, if the received sub-packet is determined to be NEW information, the method of the present invention moves to step 106 where it performs a decoding operation on the received sub-packet. The decoding operation not only decodes the received sub-packet that was sent, but also detects any errors in the received sub-  
 20 packet. In step 108, if the decoding operation does not contain any errors or if the decoding operation is somehow deemed successful by the service provider, the method of the present invention moves to step 120 where the receiving equipment transmits a positive confirmation message (e.g., ACK) and moves to step 102 to wait for NEW sub-packet. Note that a successful decoding may contain a certain number of errors; the  
 25 service provider of the communication system can arbitrarily define a successful decoding operation. Conversely, an unsuccessful decoding operation occurs when errors are detected; the service provider may, however, arbitrarily define an unsuccessful decoding operation as one in which the number of errors detected has surpassed an arbitrary threshold.

30

Returning to step 108, if the decoding operation contains errors or is somehow deemed to be unsuccessful, the method of the present invention moves to step 110 where the receiving equipment transmits a negative confirmation message (e.g., NACK) and moves to step 112. The decoded error-containing sub-packet is stored for a future combination operation with a CONTINUE sub-packet. In step 112 the receiving equipment is waiting for a CONTINUE sub-packet. When a sub-packet is received, the method of the present invention moves to step 114 to determine the status of the received sub-packet. The status of the received sub-packet is determined, as before, by examining the NEW/CONTINUE flag. If the received sub-packet is NEW, the method of the present invention moves to step 115 where it discards any previously stored sub-packet and then moves to step 106 to perform a decode operation on the received sub-packet. If the received sub-packet is CONTINUE, the method of the present invention moves to step 116 where the received sub-packet is combined with a previously received sub-packet and the combination is decoded; that is, the received sub-packet is used in conjunction with a previously received sub-packet to perform a decoding operation. The combination is done in accordance with a predefined algorithm set by the service provider. The combination operation is performed when the previously received sub-packet was only part of a packet and thus could not be properly decoded. Also, the combination operation is performed when the previously received sub-packet could not be properly decoded due to errors and this newly received sub-packet can be used to help bolster the decoding process. After the combination and decoding operations are performed the method of the present invention moves to step 108 to determine if the decoding operation was successful. It should be noted that the combination operation preferably executes the combination of a received sub-packet with a previously received sub-packet. It should also be noted that the combination operation executes the combination of a received sub-packet with all or a subset of sub-packets received after the last NEW sub-packet and including the last NEW sub-packet.

The method of the present invention thus allows for relatively fast recovery from misinterpretations of confirmation messages; this is shown more clearly by focusing on

the following steps: Returning to step 120 for a moment, suppose the ACK message transmitted by the receiving equipment is interpreted as a NACK message. Accordingly, the transmitting equipment sends a sub-packet containing a CONTINUE flag to the receiving equipment which is now at step 102. In accordance with the method of the present invention, the receiving equipment would move to step 118 and transmit an ACK message immediately giving the transmitting equipment an opportunity to move on to transmit the next NEW information.

Another type of misinterpretation can occur after step 110 is performed wherein a NACK message was transmitted. The method of the present invention moves to step 112 to wait for a sub-packet containing a CONTINUE flag. Suppose the NACK message is interpreted by the transmitting equipment as an ACK message. Accordingly, the transmitting equipment transmits a new sub-packet which is decoded immediately (step 114 followed by step 106) preventing the receiving equipment from waiting indefinitely for CONTINUE information.

The method also allows for recovery from a misinterpretation or loss of identification information in the header of transmitted sub-packet. Two situations are examined: (1) misinterpretation or loss of header information while waiting for NEW information and (2) misinterpretation or loss of header information while waiting for CONTINUE information. For the first situation we return to step 102 for the moment: a NEW sub-packet is transmitted to the receiving equipment. Due to channel errors, the header information is contaminated preventing the receiving equipment from identifying the sub-packet. Consequently, the receiving equipment does not transmit a confirmation message in response to the transmitted packet. In some realizations, the transmitter equipment will interpret a lack of a confirmation message as an implicit negative confirmation message and transmit a CONTINUE sub-packet. Upon reception of the receiver sub-packet (assuming the header information was properly interpreted) the receiver transmits an ACK (steps 104 followed by step 118) and returns to step 102 to wait for the transmission of the next sub-packet. For the second situation, we return to

step 112 where the receiving equipment is waiting for CONTINUE information. In this case, the receiving equipment having missed a CONTINUE sub-packet will attempt to combine a subsequent CONTINUE sub-packet with stored sub-packets (steps 114 and 116). However the decoding at step 116 may not be successful because of the missed sub-packet. At some point, the transmitter will move on to the transmission of the NEXT sub-packet causing the method of the present invention to move to step 115 (discard previously stored sub-packets) and then to step 106 to perform a decoding operation on the received NEW sub-packet. It is in this manner that the method of the present invention recovers from lost sub-packets due to misinterpretation or contamination of identification information.

We claim:

- 1 1. A method for receiving information in a communication system that uses ARQ with  
2 IR, the method comprises the step of:  
3               deciding which confirmation message to transmit based on an information  
4 status flag indication contained in the received information and a decoding operation  
5 performed on the received information thus providing a technique for recovering from  
6 misinterpretation of a previous confirmation message transmission.
- 1 2. The method of claim 1 wherein the step of deciding which confirmation message to  
2 transmit comprises waiting for NEW information.
- 1 3. The method of claim 1 further comprising waiting for NEW information after a  
2 positive confirmation message was transmitted.
- 1 4. The method of claim 1 further comprising transmitting a positive confirmation  
2 message after receiving NEW information while waiting for either NEW or CONTINUE  
3 information, decoding said received information successfully and discarding any  
4 previously received information.
- 1 5. The method of claim 1 where the step of deciding which confirmation message to  
2 transmit further comprises transmitting a positive confirmation message if the received  
3 information is NEW information and the decoding operation was successful.
- 1 6. The method of claim 1 where the step of deciding which confirmation message to  
2 transmit further comprises transmitting a negative confirmation message if the received  
3 information is NEW information and the decoding operation was unsuccessful
- 1 7. The method of claim 6 further comprising the steps of:



2                   waiting for CONTINUE information after the negative confirmation  
3 message was transmitted;  
4                   combining received CONTINUE information with previously received  
5 and decoded information; and  
6                   performing a decoding operation on the combined information

1   8. A method for ARQ using Incremental Redundancy, the method comprises:  
2                   transmitting a positive confirmation message after having received  
3 CONTINUE information while waiting for NEW information, or after having  
4 successfully decoded received NEW information while waiting for either NEW or  
5 CONTINUE information, or after having successfully decoded combined CONTINUE  
6 information after having waited for CONTINUE information.

1   9. The method of claim 8 further comprising the step of transmitting a negative  
2 confirmation message after any of the received information was unsuccessfully decoded.


1   10. The method of claim 8 where the received information is formatted as one or more  
2 sub-packets where each sub-packet contains a one-bit information status flag defining the  
3 packet as either NEW or CONTINUE.

1   11. The method of claim 10 where the information status flag is stored in each packet's  
2 header.

1   12. The method of claim 8 where the received NEW or CONTINUE information  
2 comprises a plurality of packets where each packet has a header, a payload and a trailer  
3 and where a one-bit NEW/CONTINUE flag is stored in the header.

### **Abstract of the Invention**

An ARQ method using Incremental Redundancy that can be used in either synchronous  
5 or asynchronous communication systems. Information received by receiving equipment  
contains a one-bit NEW/CONTINUE flag indicating whether the received information is  
the beginning of new information or the continuation (or retransmission) of previously  
transmitted information. An ACK message is transmitted by the receiving equipment  
when such equipment receives information containing a NEW flag and successfully  
10 decodes such information. The receiving equipment also transmits an ACK message  
when it receives information containing a CONTINUE flag while it was waiting for  
NEW information. Thus, the method of the present invention allows for relatively quick  
recovery from misinterpretations of ACK/NACK messages and accommodates  
subscribers having different transmission requirements.

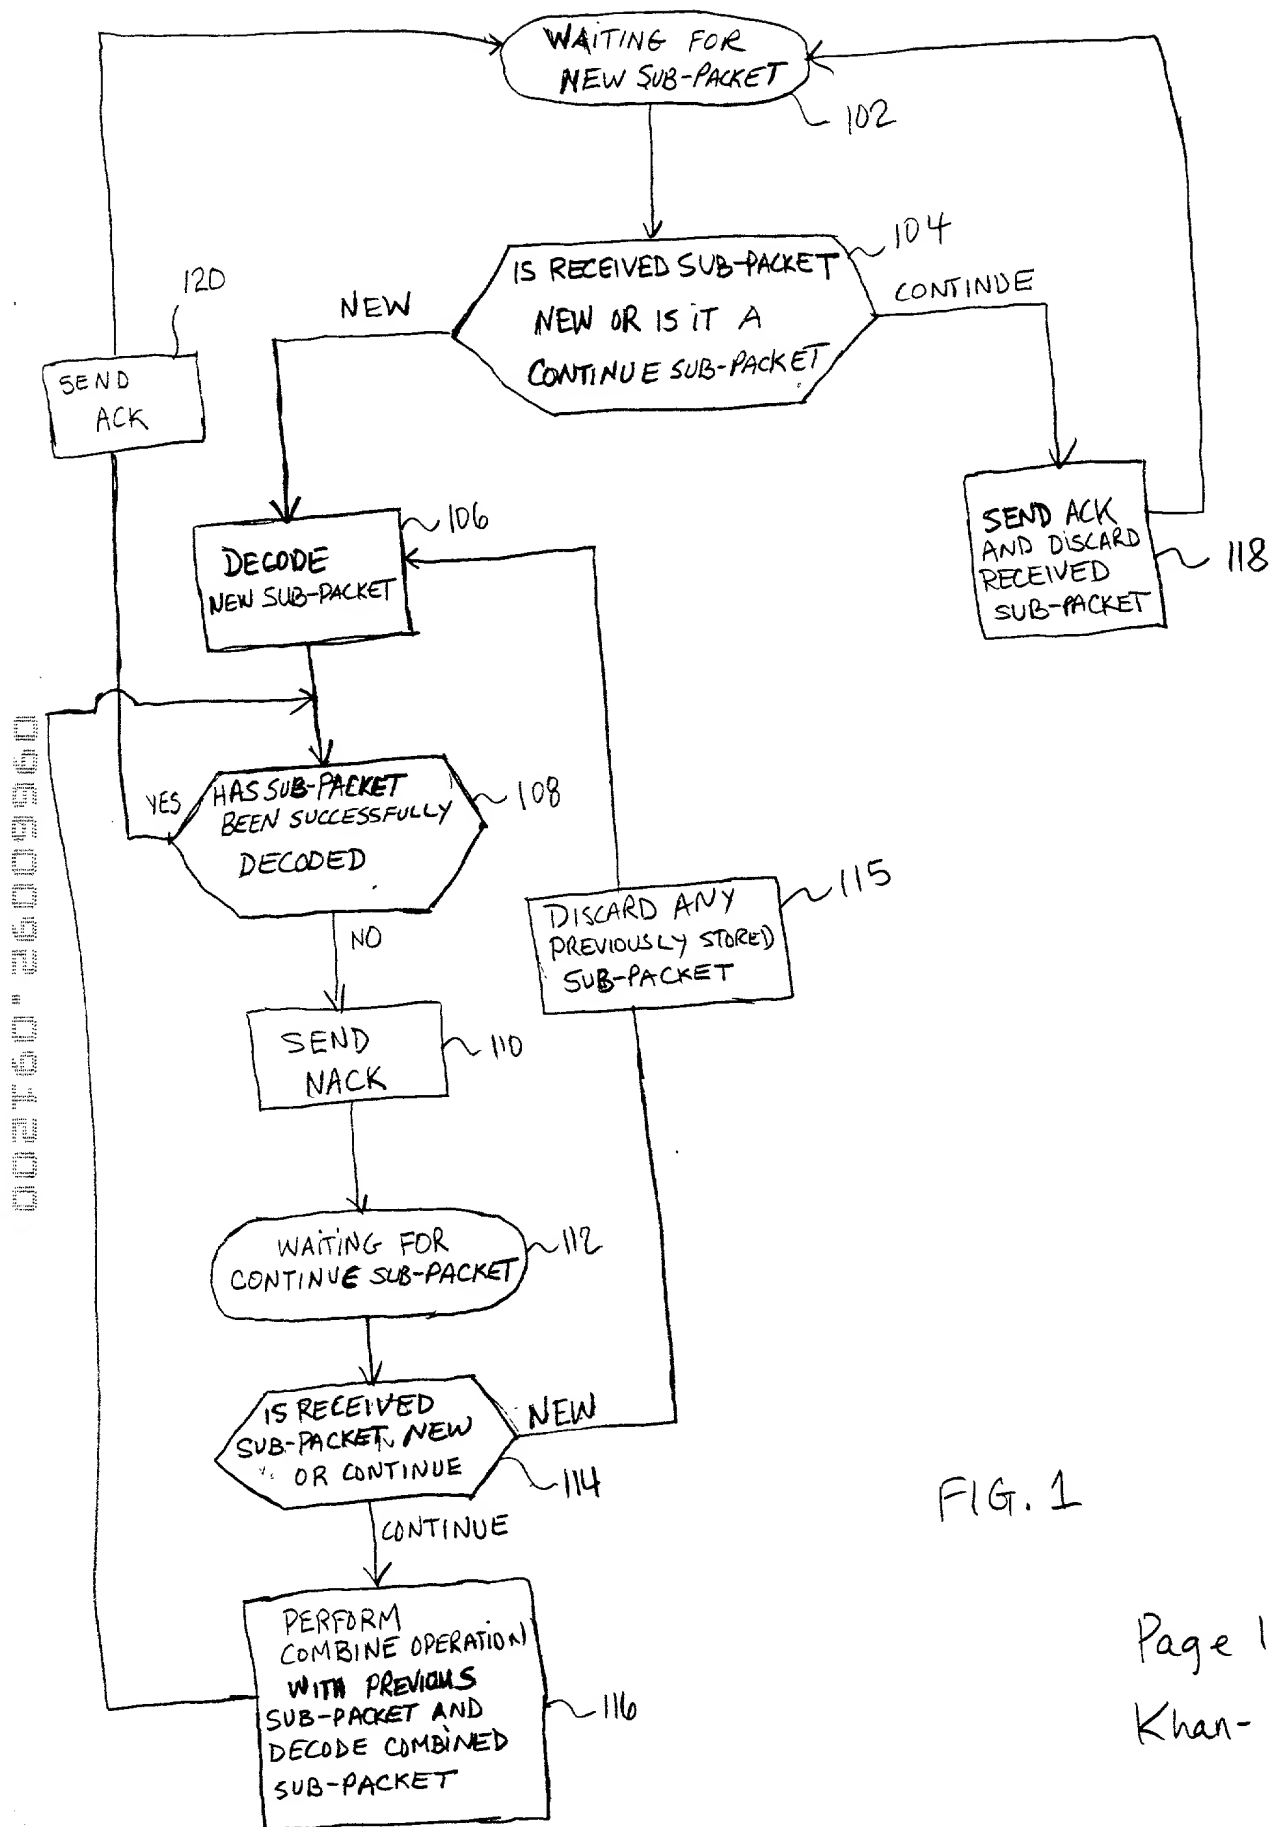

IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **Method And Apparatus For Asynchronous Incremental Redundancy Reception In A Communication System** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

0966092-094200

Variable	Mean	SD	Min	Max
Age	34.5	10.2	18	65
Gender	Male	10.5	0	20
Marital status	Married	15.2	0	30
Education	High school	12.8	0	25
Occupation	Unemployed	18.5	0	35
Income	Low	10.1	0	20
Health status	Good	15.3	0	30
Stress level	High	12.7	0	25
Life satisfaction	Low	10.4	0	20
Depression	Yes	15.6	0	30
Anxiety	Yes	12.9	0	25
Substance use	No	10.2	0	20
Family size	Small	15.1	0	30
Urban/rural	Urban	12.3	0	25
Religion	Islam	10.5	0	20
Political views	Conservative	15.4	0	30
Media consumption	High	12.6	0	25
Internet use	Yes	10.3	0	20
Smartphone use	Yes	15.7	0	30
Travel frequency	Low	10.1	0	20
Work hours	Full-time	15.2	0	30
Job satisfaction	Low	10.4	0	20
Work-life balance	Low	10.5	0	20
Health insurance	Yes	15.3	0	30
Pension plan	Yes	12.7	0	25
Retirement savings	Low	10.2	0	20
Charitable giving	Low	10.1	0	20
Volunteering	Low	10.3	0	20
Community involvement	Low	10.4	0	20
Neighborhood safety	Low	10.5	0	20
Local government	Low	10.6	0	20
Public services	Low	10.7	0	20
Infrastructure	Low	10.8	0	20
Environment	Low	10.9	0	20
Quality of life	Low	11.0	0	20
Overall well-being	Low	11.1	0	20

Variable	Mean	SD	Min	Max
Age	34.5	10.2	18	65
Gender	Male	10.5	0	20
Marital status	Married	15.2	0	30
Education	High school	12.8	0	25
Occupation	Unemployed	18.5	0	35
Income	Low	10.1	0	20
Health status	Good	15.3	0	30
Stress level	High	12.7	0	25
Life satisfaction	Low	10.4	0	20
Depression	Yes	15.6	0	30
Anxiety	Yes	12.9	0	25
Substance use	No	10.2	0	20
Family size	Small	15.1	0	30
Urban/rural	Urban	12.3	0	25
Religion	Islam	10.5	0	20
Political views	Conservative	15.4	0	30
Media consumption	High	12.6	0	25
Internet use	Yes	10.3	0	20
Smartphone use	Yes	15.7	0	30
Travel frequency	Low	10.1	0	20
Work hours	Full-time	15.2	0	30
Job satisfaction	Low	10.4	0	20
Work-life balance	Low	10.5	0	20
Health insurance	Yes	15.3	0	30
Pension plan	Yes	12.7	0	25
Retirement savings	Low	10.2	0	20
Charitable giving	Low	10.1	0	20
Volunteering	Low	10.3	0	20
Community involvement	Low	10.4	0	20
Neighborhood safety	Low	10.5	0	20
Local government	Low	10.6	0	20
Public services	Low	10.7	0	20
Infrastructure	Low	10.8	0	20
Environment	Low	10.9	0	20
Quality of life	Low	11.0	0	20
Overall well-being	Low	11.1	0	20

Full name of 1st joint inventor: Farooq Ullah Khan


Inventor's signature  Date 09-12-2000

Residence: Manalapan, Monmouth County, New Jersey

Citizenship: Pakistan

Post Office Address: 22 Inverness Drive  
Manalapan, New Jersey, 07726

Full name of 2<sup>nd</sup> inventor: Sanjiv Nanda

Inventor's signature  Date 9/12/00

Residence: Clarksburg, Monmouth County, New Jersey

Citizenship: United States of America

Post Office Address: 34 Robbins Road  
Clarksburg, New Jersey, 08510

002760 25009560